


BRASS AND CHROME PLATED CYLINDER VALVES

O-RING SEAL TECHNOLOGY FOR ALL INDUSTRIAL AND MEDICAL GASES

Control Devices valves are rigorously tested through a robust quality assurance system, and Control Devices maintains carefully monitored manufacturing processes to ensure that all valves meet or exceed design and performance specifications. Our one year warranty covers defects in material and workmanship.

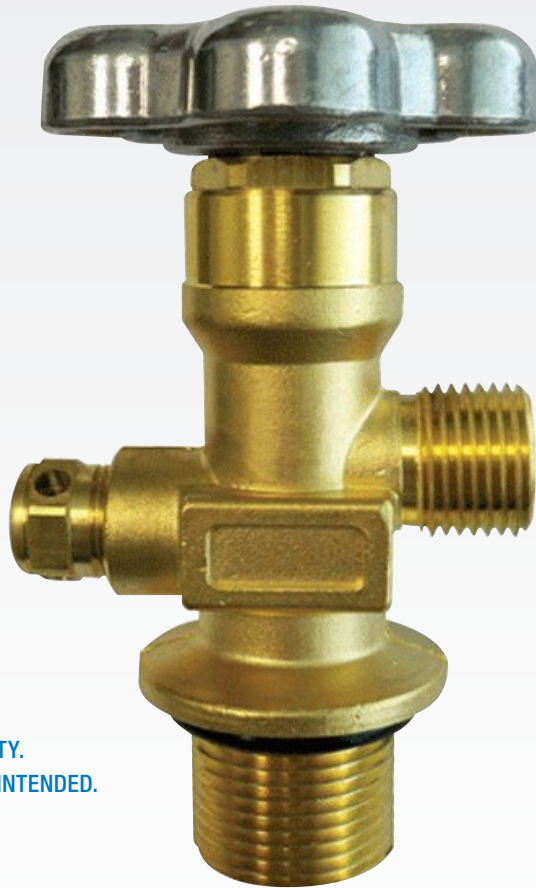

- O-RING SEAL TECHNOLOGY PROVIDES SUPERIOR LEAK INTEGRITY.
- LOWER PLUGS ARE DESIGNED SPECIFIC FOR THE GAS SERVICE INTENDED.
- EASY OPERATION UNDER ALL PRESSURES.
- 100% LEAK TESTING ON ENTIRE PRODUCTION.
- MEETS AND EXCEEDS CGA V9 AND ISO 10297.
- UNITIZED PLUG WITH ROBUST HEX AND THREADS INSURE EASY INSTALLATION.
- MOST VALVES SUPPLIED WITH THREADED INLET FOR SIPHON TUBES.
- OXYGEN VALVES PASSED STRINGENT ADIABATIC OXYGEN COMPRESSION TESTING PER ISO 10297.
- ALL VALVES ARE BAGGED AND CLEANED FOR OXYGEN SERVICE PER CGA G4.1.
- COMMON DESIGN SAFETY AND HAND WHEELS READILY AVAILABLE.
- ALL VALVES ARE SUPPLIED WITH INLET O-RING.

CONTROL DEVICES, LLC HEADQUARTERS
1555 LARKIN WILLIAMS ROAD
FENTON, MISSOURI 63026

+1 636.660.7100
+1 800.233.1477

WWW.CDIVALVE.COM



control
devices, LLC

HARRISON

PARALLEL / STRAIGHT THREADS FOR ALUMINUM CYLINDERS

PART NUMBER	GAS SERVICE	CGA	OUTLET THREAD	INLET	SAFETY
V320-3-1-XXXX	Carbon Dioxide	320	..725-14NGO RH EXT	.750-16UNF2A	CG1
V320-5-1-XXXX	Carbon Dioxide	320	.725-14NGO RH EXT	1.125-12UNF2A	CG1
V326-5-1-XXXX	Nitrous Oxide	326	.825-14NGO RH EXT	1.125-12UNF2A	CG1
V346-5-1-XXXX	Breathing Air	346	.825-14NGO RH EXT	1.125-12UNF2A	CG1
V350-5-5-XXXX	Hydrogen	350	.825-14NGO RH EXT	1.125-12UNF2A	CG5
V500-5-1-XXXX	Medical Gas Mixture	500	.885-14NGO LH EXT	1.125-12UNF2A	CG1
V540-3-1-XXXX	Oxygen	540	.903-14NGO RH EXT	.750-16UNF2A	CG1
V540-5-1-XXXX	Oxygen	540	.903-14NGO RH EXT	1.125-12UNF2A	CG1
V580-3-1-XXXX	Inert (Helium, Nitrogen, Argon)	580	.965-14NGO RH INT	.750-16UNF2A	CG1
V580-5-1-XXXX	Inert (Helium, Nitrogen, Argon)	580	.965-14NGO RH INT	1.125-12UNF2A	CG1
V590-5-1-XXXX	Industrial Air, Sulphur Hexafluoride	590	.965-14NGO RH INT	1.125-12UNF2A	CG1
V660-5-1-XXXX	Sulphur Dioxide	660	1.030-14NGO RH INT	1.125-12UNF2A	CG1

The suffix "xxxx" denotes pressure relief device burst disc rupture pressure.
Refer to the safety device ordering information chart for pressures available.
Chrome plating: To order, change the letter "V" in the part number to letter "CV"
example: V540-6-1-xxxx becomes VC540-6-1-xxxx

Fusible backed pressure relief devices in 212F nominal melting temperatures are standard with CGA350.

CYLINDER SERVICE PRESSURE IN PSIG	PRESSURE RELIEF DEVICE STAMPING	DISC RUPTURE RANGE 165F		PRESSURE RELIEF DEVICE REPLACEMENT PART NUMBER	
		MINIMUM	MAXIMUM	CG-1 FRANGIBLE DISC	CG-5 FRANGIBLE DISC / 212 FUSE METAL
1800	3000	2700	3000	HBV-CG1-3000	HBV-CG5-3000
2015	3360	3025	3360	HBV-CG1-3360	HBV-CG5-3360
2265	3775	3400	3775	HBV-CG1-3775	HBV-CG5-3775
3000	5000	4500	5000	HBV-CG1-5000	HBV-CG5-5000

